


DATA SHEET

COMPOSITE INSULATED PANELS



45/250

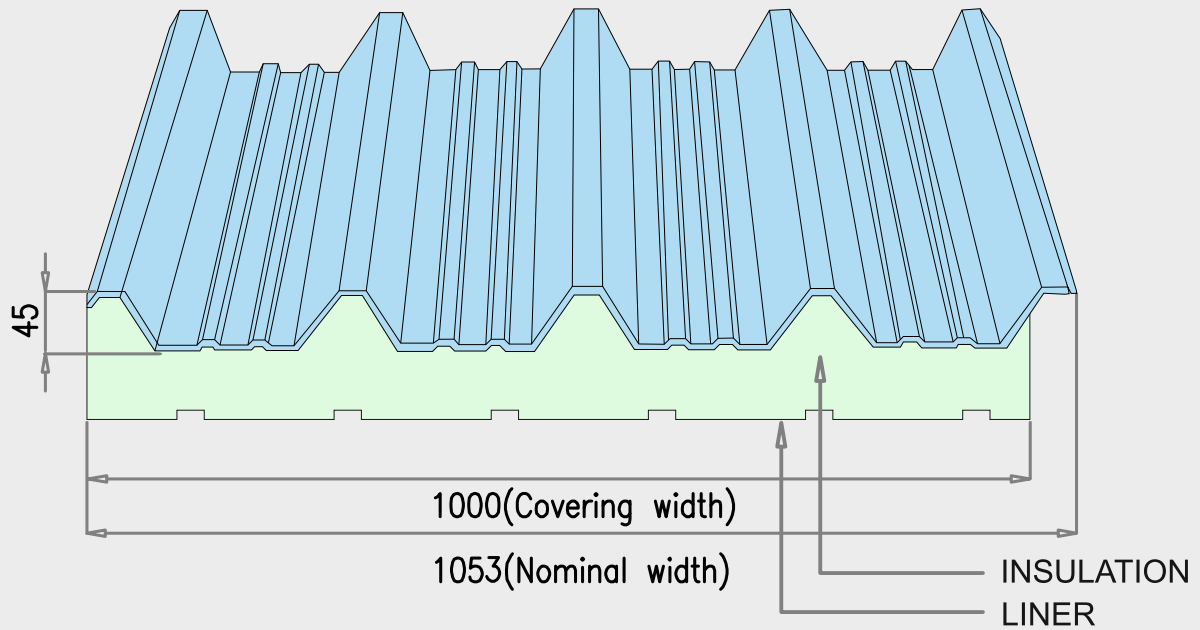

Composite panels are produced using rigid polyurethane with external and internal sheets in steel or aluminium of varying thickness, coating and colours.

PU

Average Density	:	35 Kg/M ³
Thickness	:	25 - 100 MM

"U" VALUE

PU THICKNESS	W/M ² °C
25 MM	0.76
35 MM	0.54
50 MM	0.38
75 MM	0.27
100 MM	0.21

See data sheet for single skin.
Contact Vibgyor for information regarding coating and colours.

PLOT #L-81/L-83/L-85, AL GHAIL INDUSTRIAL PARK, RAS AL KHAIMAH-UAE
TEL: +(971) 7221 1252 | FAX: +(971) 7221 3554 | EMAIL: engineering@vibgyorgroup.co